


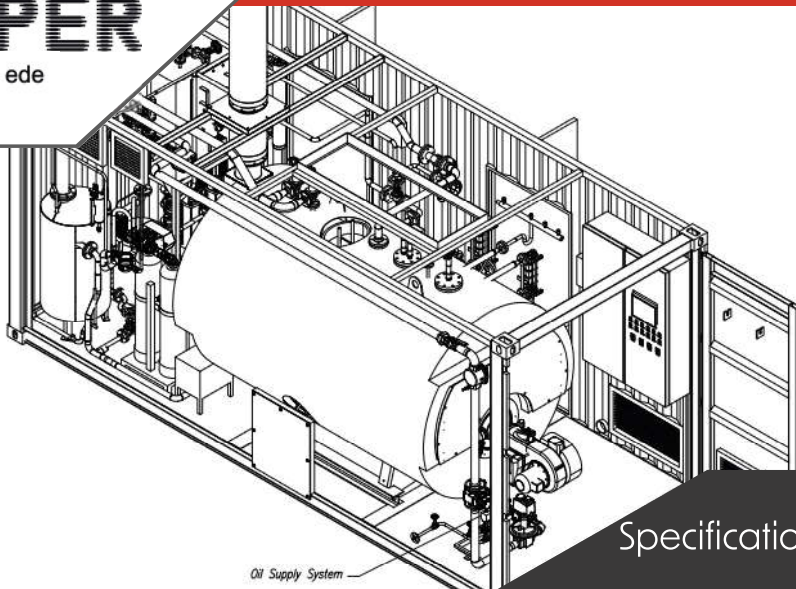


Specificationsheet 1.150 kg/h, 16 Barg

Rental boiler 110

Connections

Natural gas	DN50, PN16
Min. conn. pressure	100 Mbar
Max. conn. pressure	0,5 Barg
Max. gasflow	90 Nm³/h
Light oil	3/4
Min. conn. pressure	-0,4 Barg
Max. conn. pressure	5 Barg
Max. oil flow	98 l/h
Water	DN25, PN40
Min. conn. pressure	3 Barg
Max. conn. pressure	5 Barg
Min. conductivity	10 µS/cm
min. PH value	10,5 pH
Cooling water conn.	included
Steam	DN50, PN40
Max. steam pressure	16 Barg
Max. steamcapacity	1.150 T/H
Condensate return	DN50, PN16
Draine	DN65, PN16
Elektrical	CEE, 32A
Voltage	400 Volt
Amperage	32A Ampère
Frequency	50 Hertz
Rotating field	Right
Remote connection	Yes

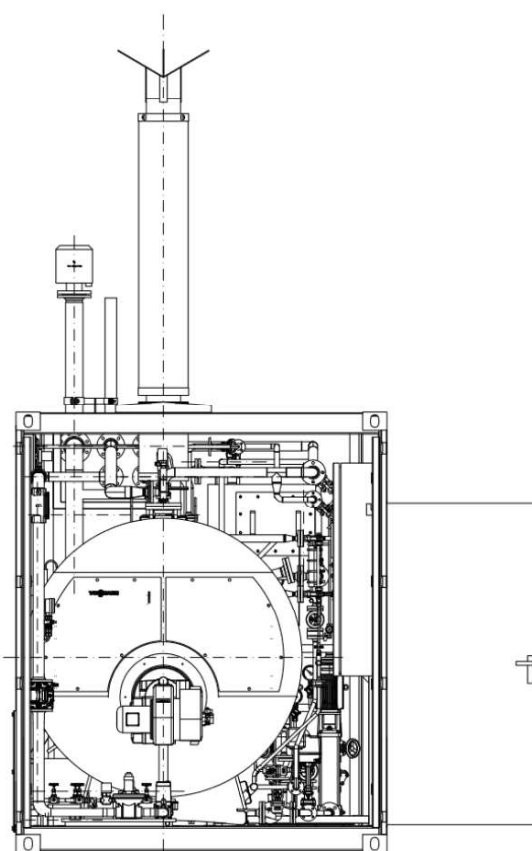

Comments

Including chemical dosing unit and softener.

Dimensions

Transport dimensions LxBxH	605x244x325 CM
Operation dimensions LxBxH	650x244x550 CM
Transport weight	12000 KG
Operation weight	16000 KG

Optional accessoires

Degasifier	No
Economiser	No
Oiltank	Yes

Driven by steam since 1918